



Performance Curves


SolidC-1 Centrifugal Pumps - 60 Hz US

VM66390 US1 2003-06

Motor: **1800 rpm. synchron.**
 Tolerance: $\pm 10\%$
 Impeller, Max. dia.: 6.30"
 Impeller, Min. dia.: 4.33"
 Pump inlet, Dia.: 2"
 Pump outlet, Dia.: 1½"

Performance data refer to water at 68°F.

NOTE!
 The curves refer to motor: 2.4 Hp (1.8 kW), 1710 rpm. asynchr., 60 Hz.

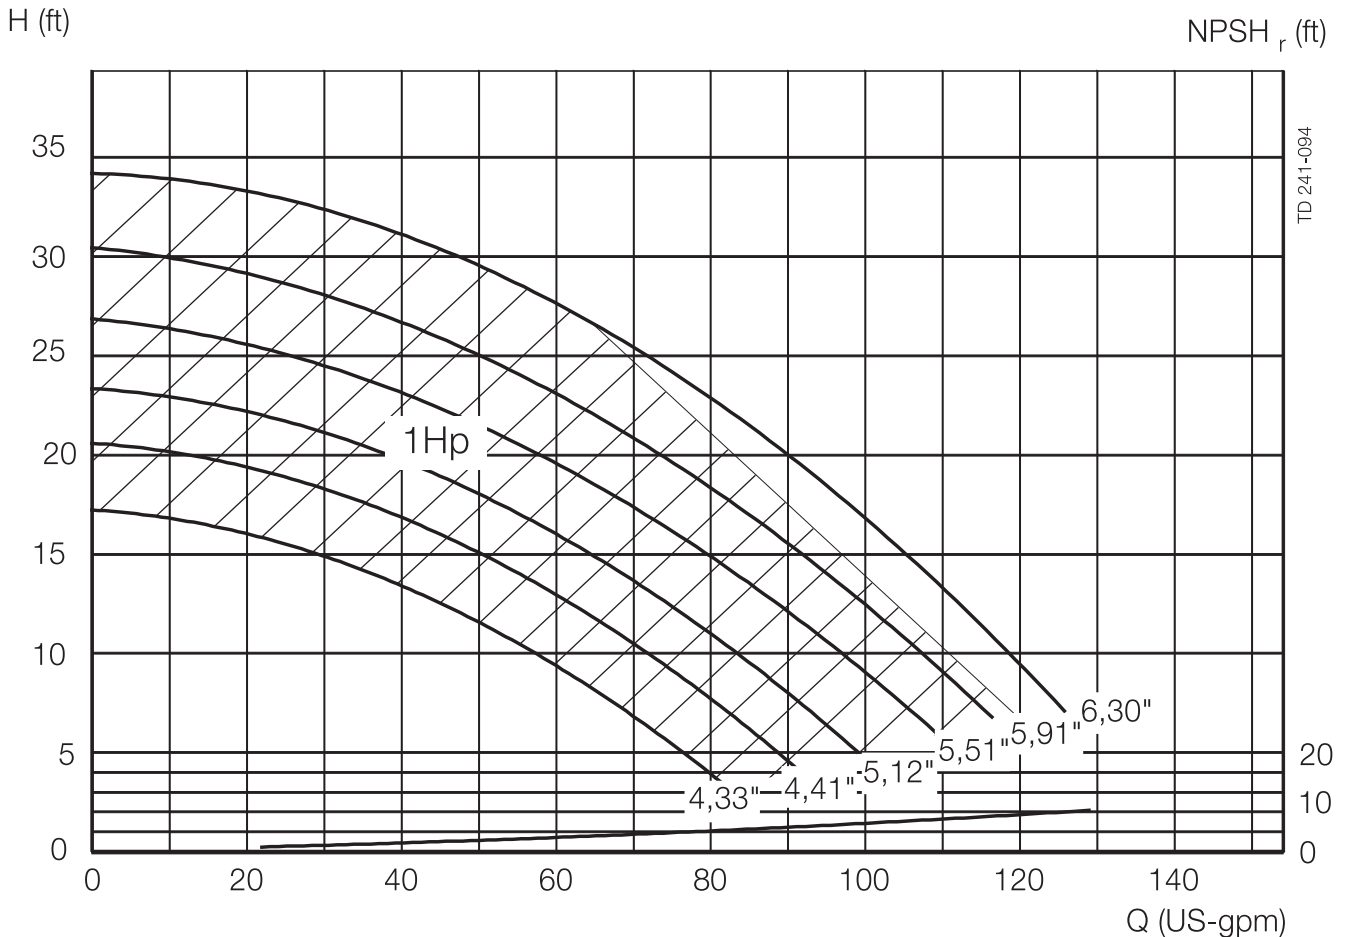

TD 241-094





Performance Curves

SolidC-1 Centrifugal Pumps - 60 Hz US


VM66390 US1 2003-06

Motor: **3600 rpm. synchr.**
 Tolerance: $\pm 10\%$
 Impeller, Max. dia.: 6.30"
 Impeller, Min. dia.: 3.54"
 Pump inlet, Dia.: 2"
 Pump outlet, Dia.: 1½"

Performance data refer to water at 68°F.

NOTE!

The curves refer to motor: 8.85 Hp (6.6 kW), 3540 rpm. asynchr., 60 Hz.

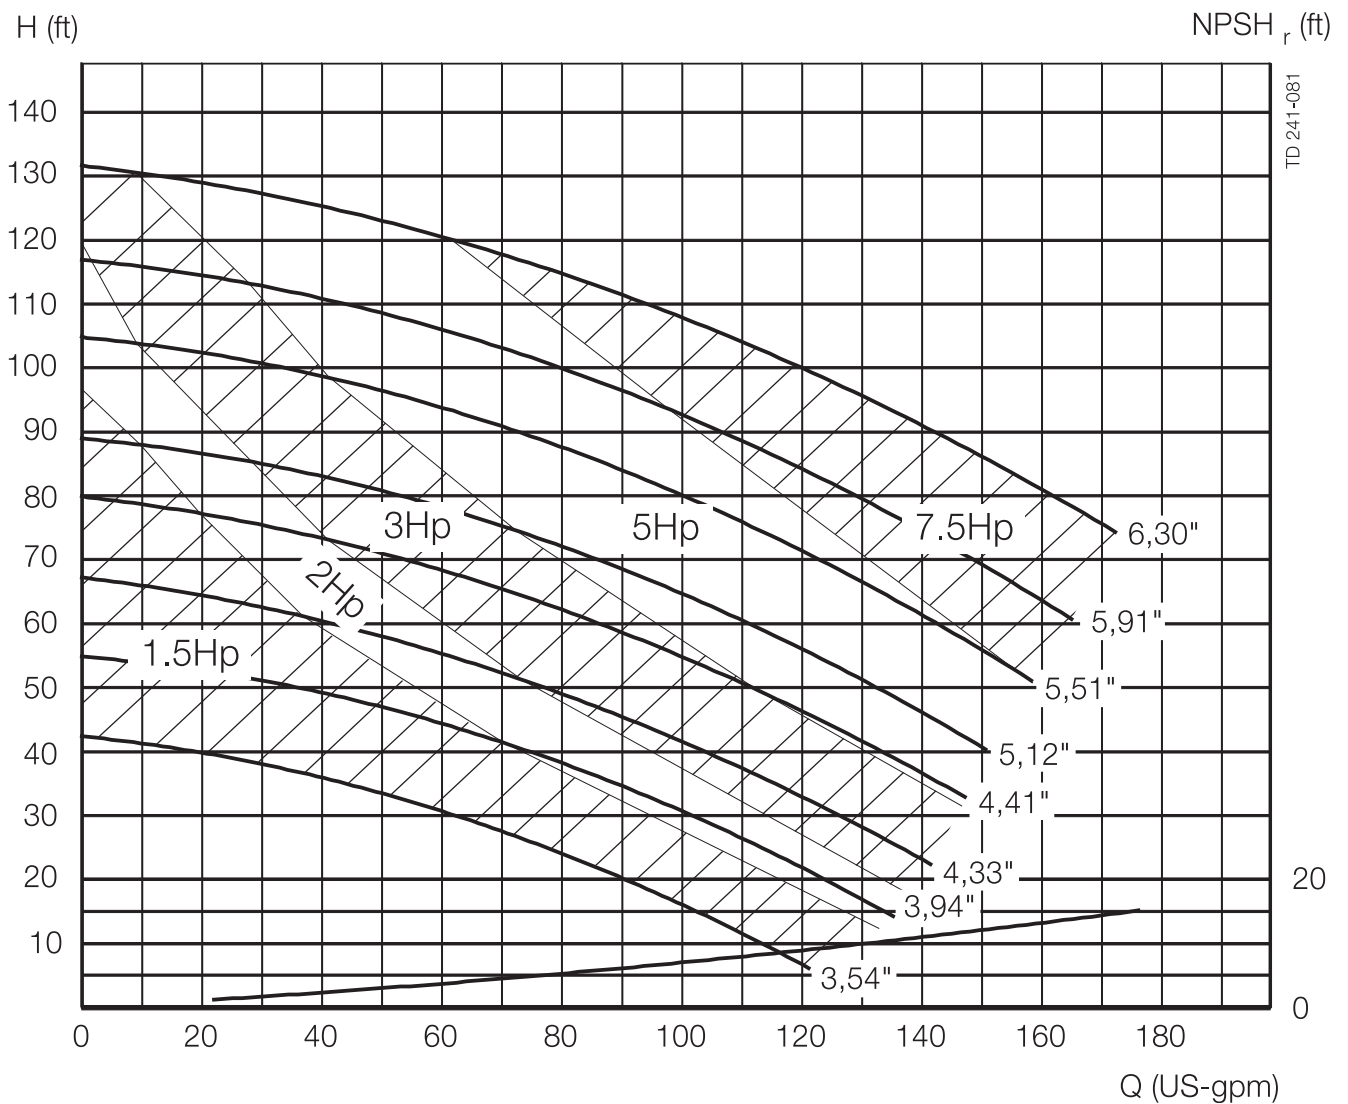

Central States Industrial
 2700 Partnership Boulevard
 Springfield, MO 65803
 800.654.5635
<http://www.csidesigns.com>



Performance Curves


SolidC-2 Centrifugal Pumps - 60 Hz US

VM66390 US1 2003-06

Motor: **1800 rpm. synchr.**
 Tolerance: $\pm 10\%$
 Impeller, Max. dia.: 7.48"
 Impeller, Min. dia.: 5.51"
 Pump inlet, Dia.: 2½"
 Pump outlet, Dia.: 1½"

Performance data refer to water at 68°F.

NOTE! The curves refer to motor: 3.6 Hp (2.7 kW), 1710 rpm. asynchr., 60 Hz.

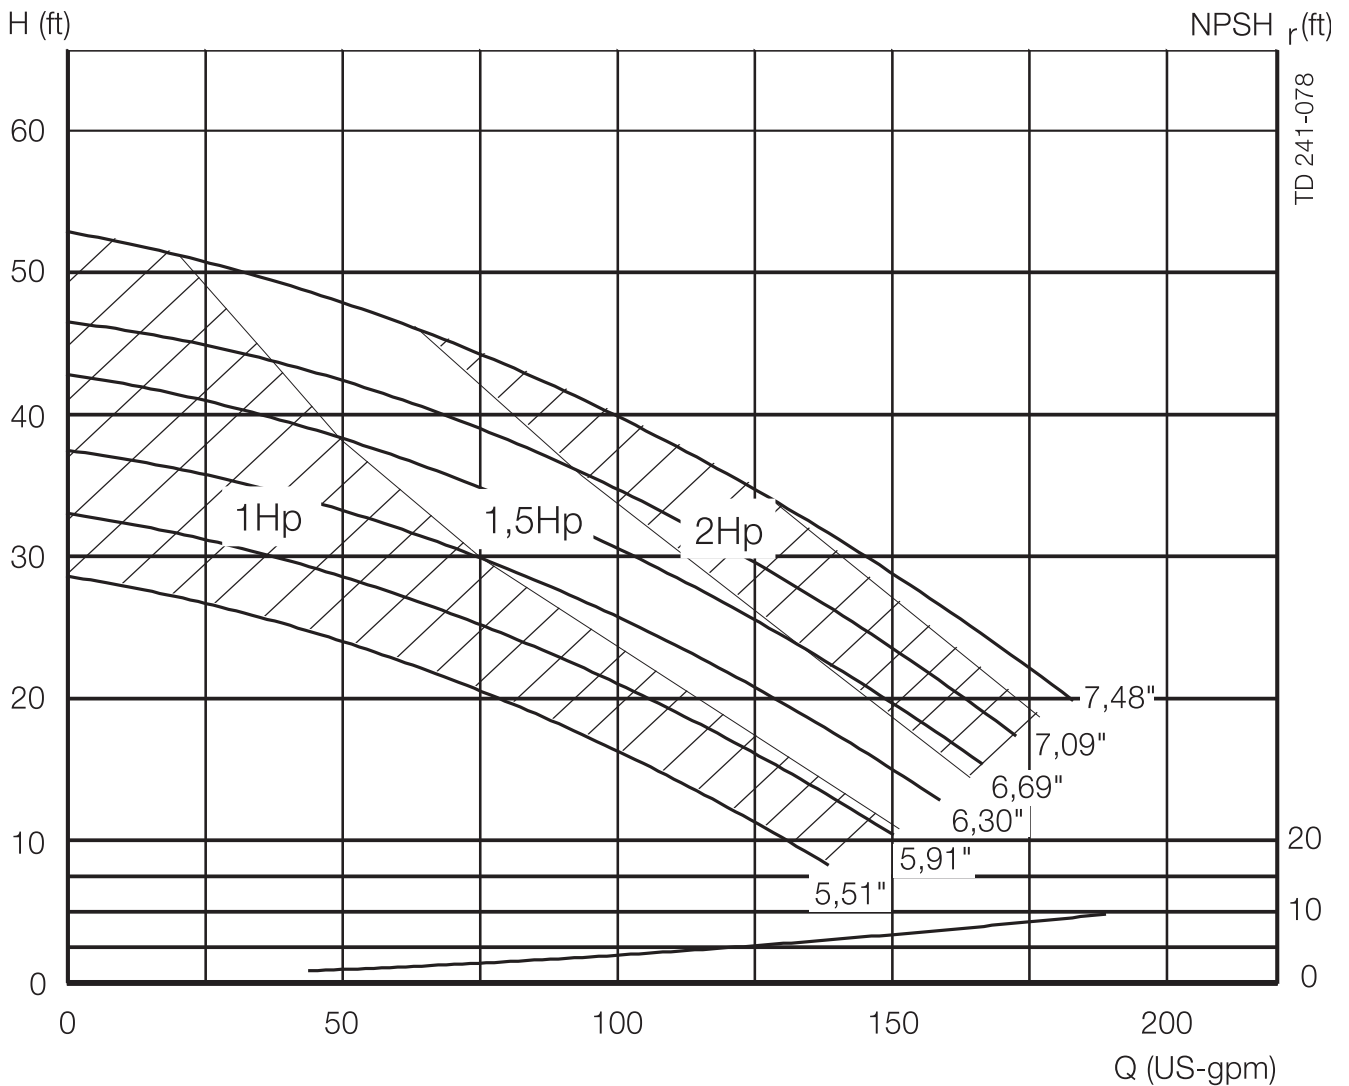

Central States Industrial
 2700 Partnership Boulevard
 Springfield, MO 65803
 800.654.5635
<http://www.csidesigns.com>



Performance Curves


SolidC-2 Centrifugal Pumps - 60 Hz US

VM66390 US1 2003-06

Motor: **3600 rpm. synchr.**
 Tolerance: $\pm 10\%$
 Impeller, Max. dia.: 7.48"
 Impeller, Min. dia.: 5.51"
 Pump inlet, Dia.: 2½"
 Pump outlet, Dia.: 1½"

Performance data refer to water at 68°F.

NOTE! The curves refer to motor: 22.8 Hp (18 kW), 3535 rpm. asynchr., 60 Hz.

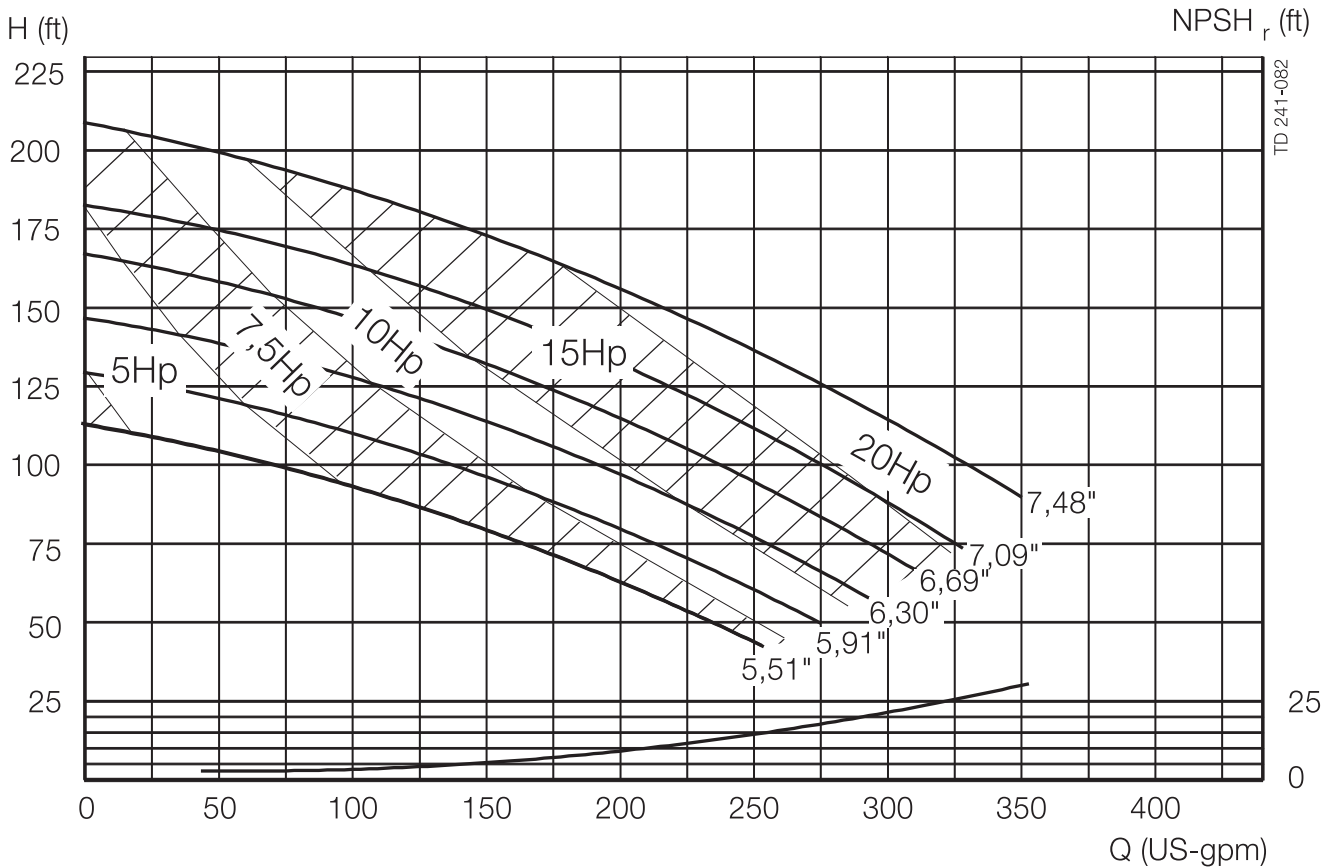

Central States Industrial
 2700 Partnership Boulevard
 Springfield, MO 65803
 800.654.5635
<http://www.csidesigns.com>



Performance Curves

SolidC-3 Centrifugal Pumps - 60 Hz US

VM66390 US1 2003-06

Motor: **1800 rpm. synchr.**
 Tolerance: $\pm 10\%$
 Impeller, Max. dia.: 8.66"
 Impeller, Min. dia.: 6.69"
 Pump inlet, Dia.: 3"
 Pump outlet, Dia.: 1½"

Performance data refer to water at 68°F.

NOTE! The curves refer to motor: 8.4 Hp (3.6 kW), 1720 rpm. asynchr., 60 Hz.



Central States Industrial
 2700 Partnership Boulevard
 Springfield, MO 65803
 800.654.5635
<http://www.csidesigns.com>



Performance Curves


SolidC-3 Centrifugal Pumps - 60 Hz US

VM66390 US1 2003-06

Motor: **3600 rpm. synchron.**
 Tolerance: $\pm 10\%$
 Impeller, Max. dia.: 8.66"
 Impeller, Min. dia.: 6.69"
 Pump inlet, Dia.: 3"
 Pump outlet, Dia.: 1½"

Performance data refer to water at 68°F.

NOTE! The curves refer to motor: 33.5 Hp (25 kW),
 3555 rpm. asynchr., 60 Hz.

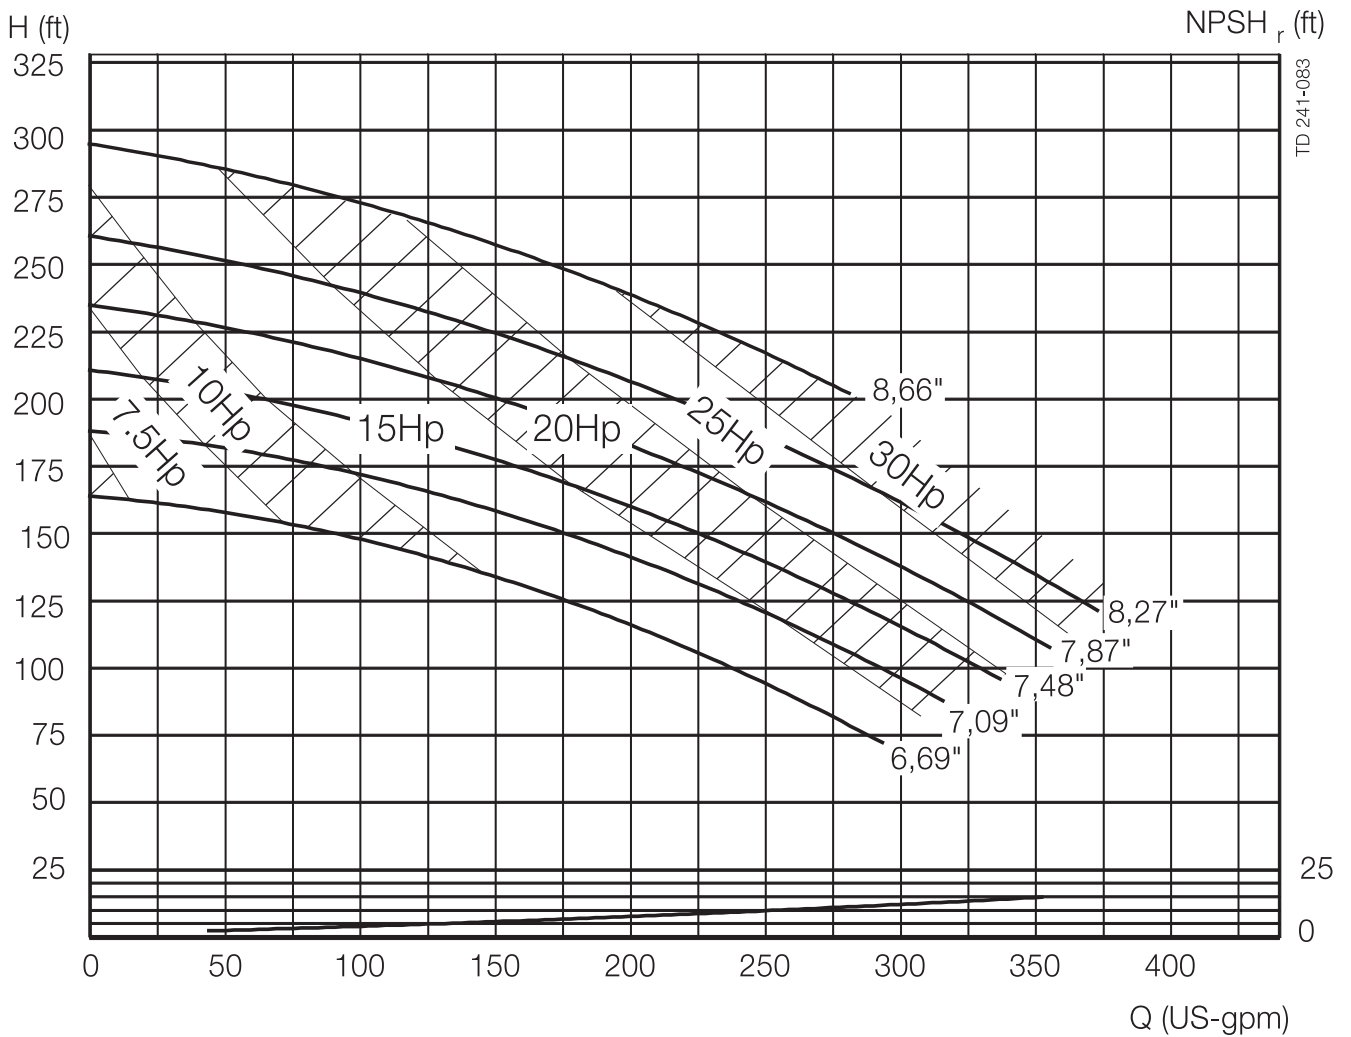

Central States Industrial
 2700 Partnership Boulevard
 Springfield, MO 65803
 800.654.5635
<http://www.csidesigns.com>



Performance Curves


SolidC-4 Centrifugal Pumps - 60 Hz US

VM66390 US1 2003-06

Motor: **1800 rpm. synchr.**
 Tolerance: $\pm 10\%$
 Impeller, Max. dia.: 9.84"
 Impeller, Min. dia.: 7.87"
 Pump inlet, Dia.: 3"
 Pump outlet, Dia.: 2"

Performance data refer to water at 68°F.

NOTE! The curves refer to motor: 9.1 Hp (6.8 kW), 1770 rpm. asynchr., 60 Hz.

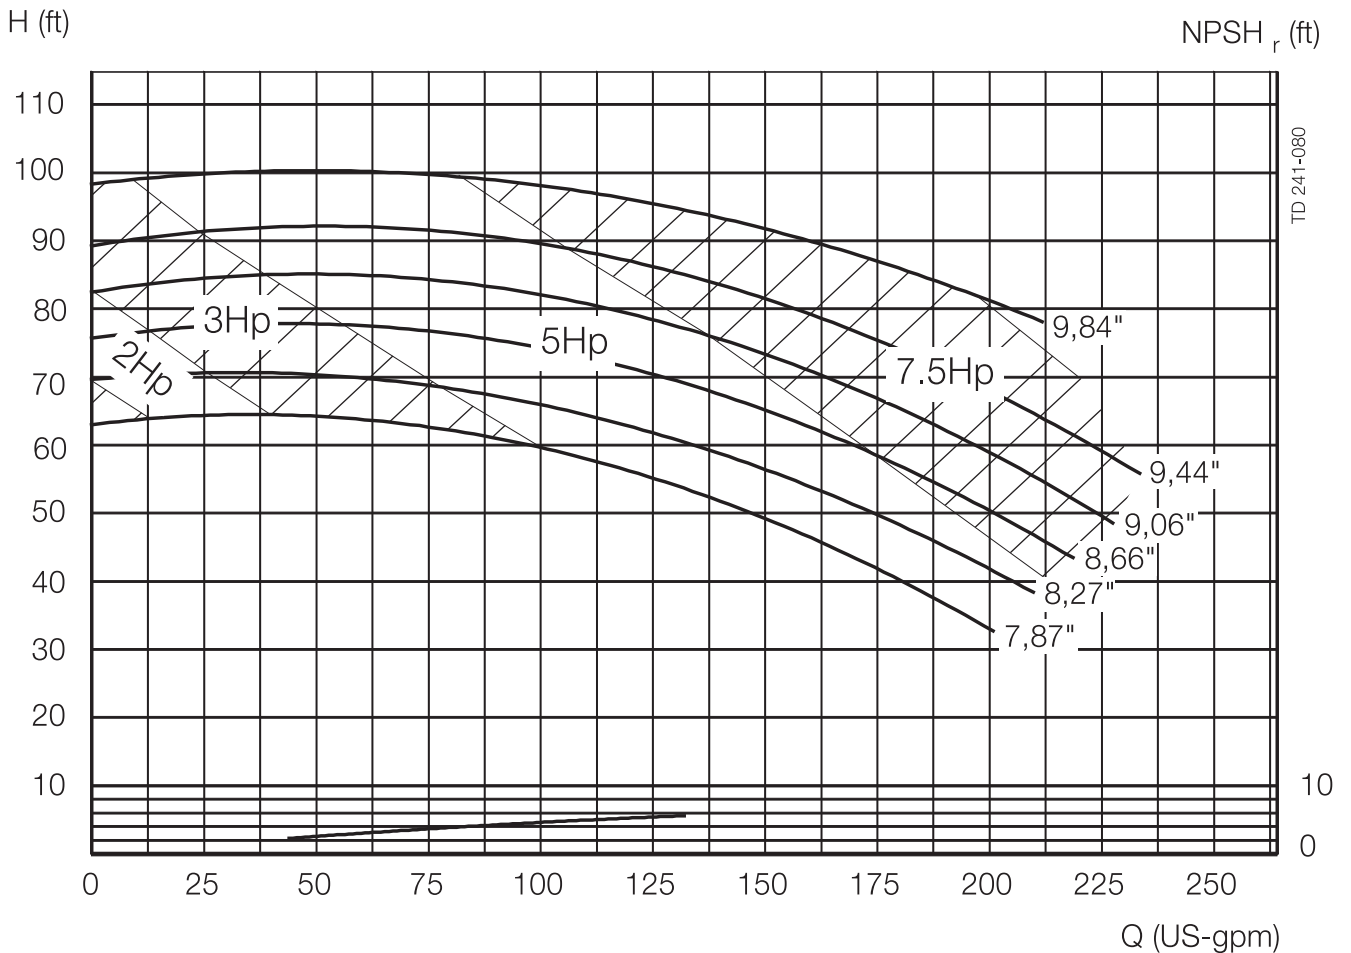

Central States Industrial
 2700 Partnership Boulevard
 Springfield, MO 65803
 800.654.5635
<http://www.csidesigns.com>



Performance Curves


SolidC-4 Centrifugal Pumps - 60 Hz US

VM66390 US1 2003-06

Motor: **3600 rpm. synchron.**
 Tolerance: $\pm 10\%$
 Impeller, Max. dia.: 9.84"
 Impeller, Min. dia.: 7.87"
 Pump inlet, Dia.: 3"
 Pump outlet, Dia.: 2"

Performance data refer to water at 68°F.

NOTE! The curves refer to motor: 33.5 Hp (25 kW), 3555 rpm. asynchr., 60 Hz.

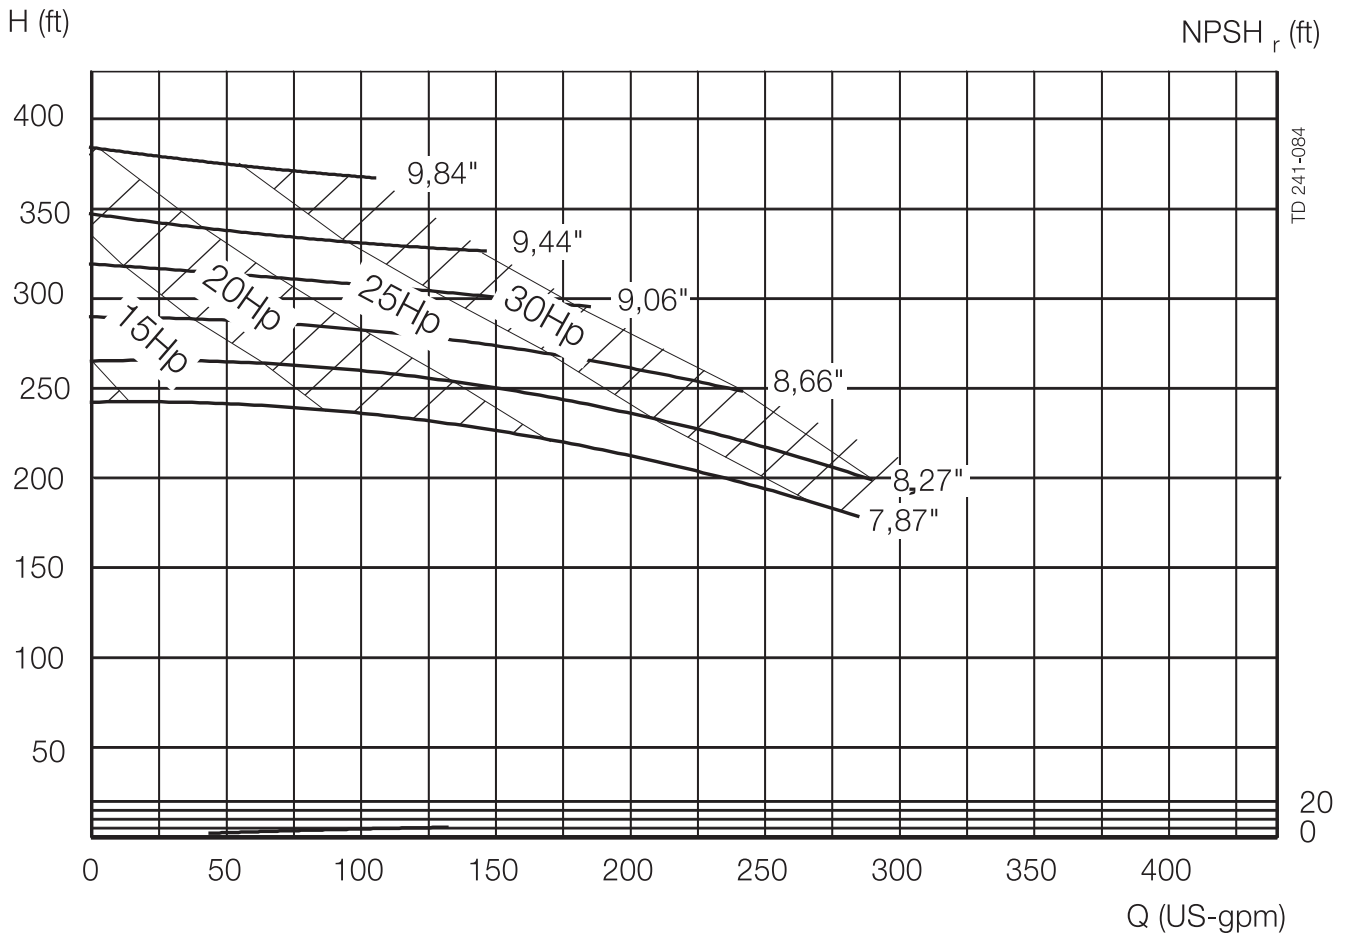

Central States Industrial
 2700 Partnership Boulevard
 Springfield, MO 65803
 800.654.5635
<http://www.csidesigns.com>